

Telescopic Truck Mounted Platform




B-LIFT 27

TECHNICAL DATA

- 640° Turret rotation
- Smooth proportional controls with acceleration and deceleration ramps
- CAN BUS electronic management system
- Ground control station with 7m cable wired console
- Diagnostic display on board
- Automatic engine rpm management
- Engine start/stop control from the basket and the ground
- Anti-slip aluminum deck
- Aluminum basket (1400x700x1100 mm)
- 90° + 90° hydraulic basket rotation
- Electronic basket levelling system
- 4 stabilisers with variable configuration and ground pressure sensors
- Working envelope with S3 Smart Stability System
- Hydraulic system operated by vehicle's PTO
- Buzzer indicating PTO engaged
- Hour meter
- 230 V AC plug in the basket
- EN 280:2013 CE certified
- Standard boom colours blue (RAL 5017) and white (RAL 9003)

PERFORMANCE

Working height	27* m
Platform height	25 m
Working outreach	13 m
Capacity	80 / 230 kg
Basket dim.	1400x700x1100 mm
GVW minimum	3,5 t

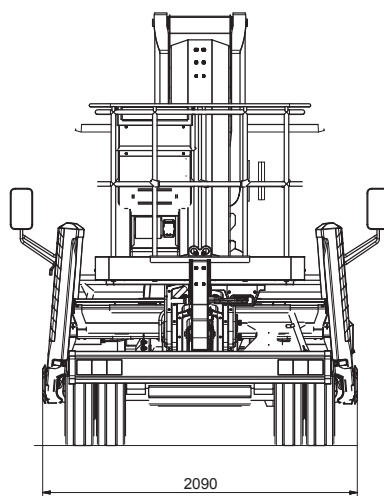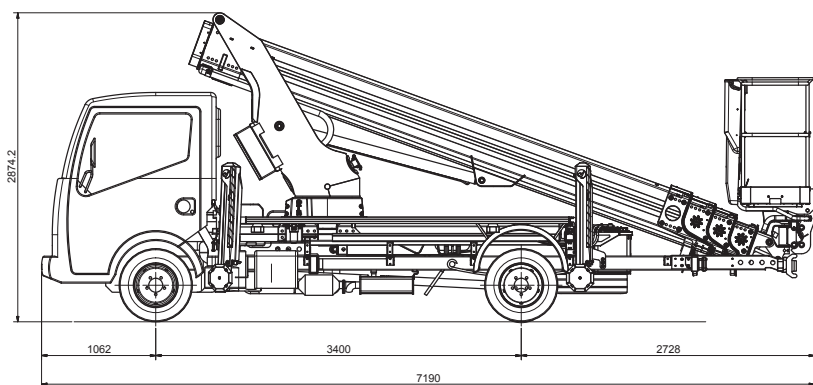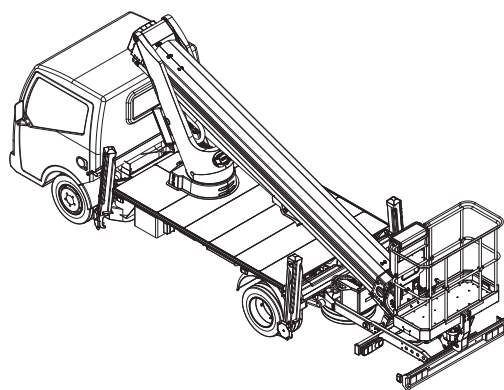

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only.



www.instant.no

INSTANT

Norway

Tel.: +47 23 19 11 00
info@instant.no

Lithuania

Tel.: +370 5 233 1096
info@instant.lt

Latvia

Tel.: +371 263 58 152
info@instantlatvija.lv


Estonia

Tel.: +372 680 76 33
info@instant.ee


Telescopic Truck Mounted Platform

B-LIFT 27

WORKING ENVELOPE

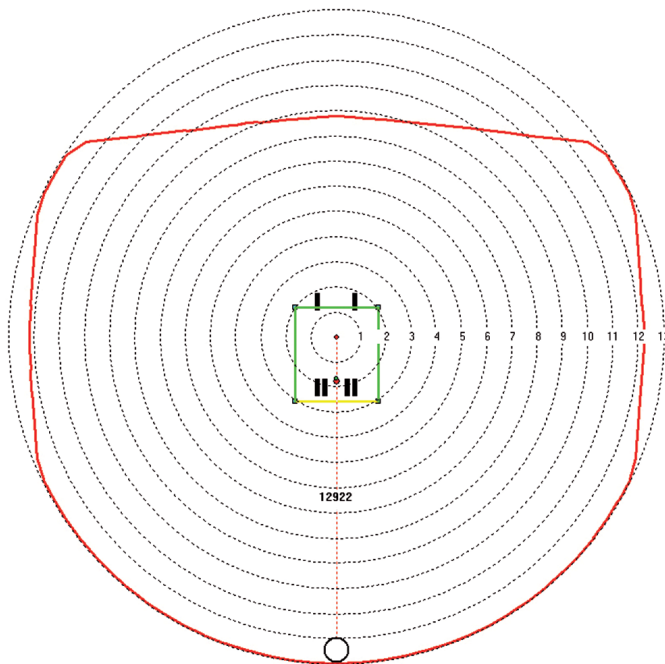

80 kg basket capacity

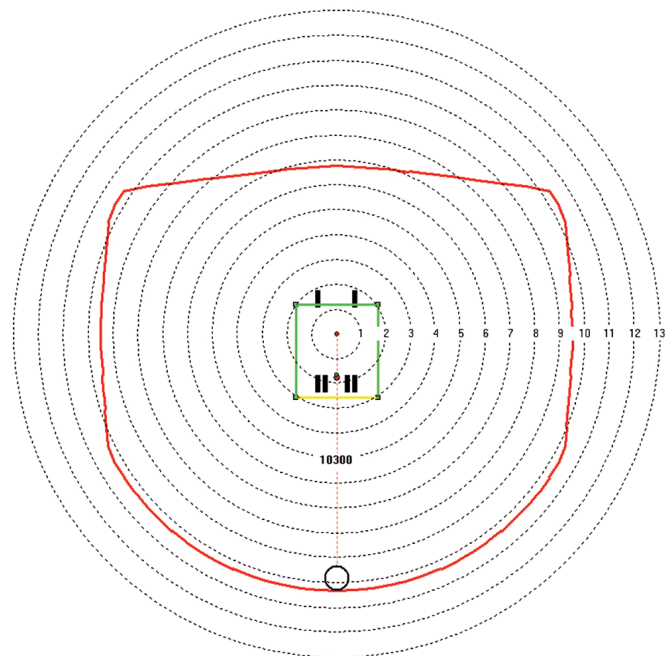

230 kg basket capacity

Product specifications are subject to change without notice or obligation. Technical features and drawings in this brochure are for illustrative purposes only.



www.instant.no

INSTANT

Norway

Tel.: +47 23 19 11 00
info@instant.no

Lithuania

Tel.: +370 5 233 1096
info@instant.lt

Latvia

Tel.: +371 263 58 152
info@instantlatvija.lv

Estonia

Tel.: +372 680 76 33
info@instant.ee